


# CLEAN UNIT

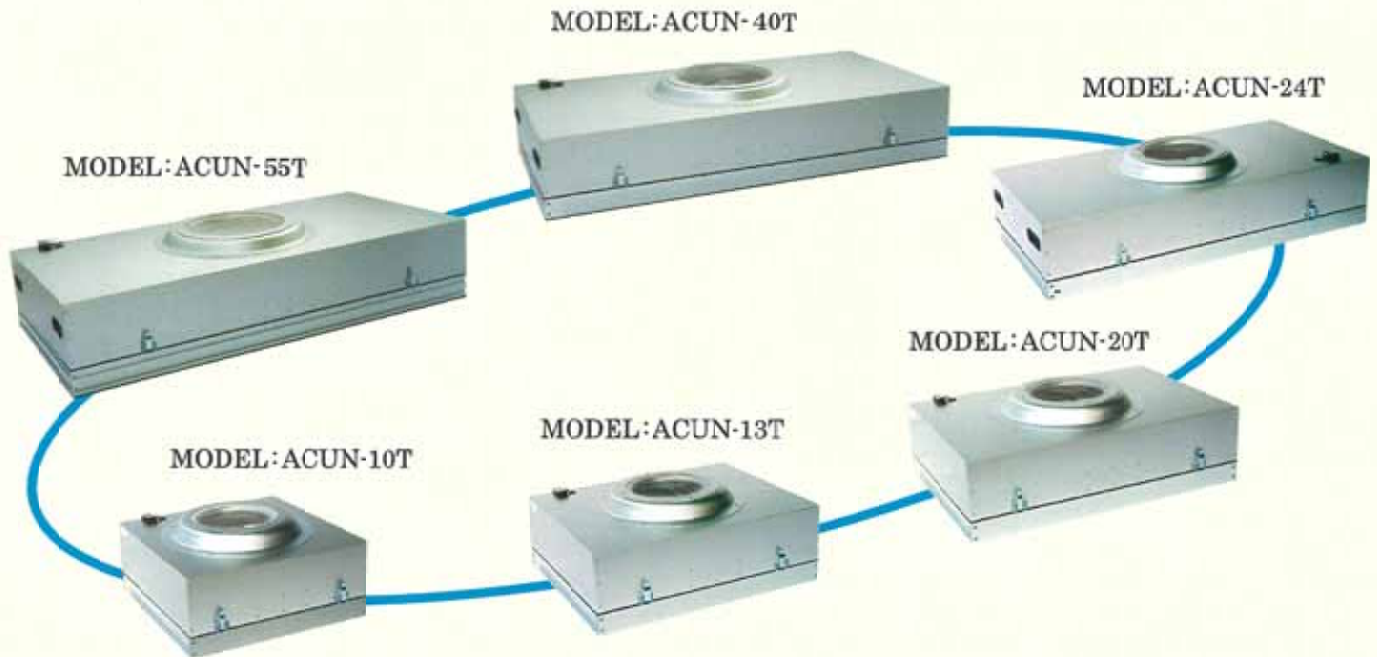

DAN SCIENCE CO.,LTD.  
 2161-5,Miyama-cho,Hachioji-shi,  
 Tokyo,192-0152,Japan  
 Tel:+81-426-50-7311  
 Fax:+81-426-50-7310

- 新開発 Fan の採用で 50% の省 Energy 化 (当社比)  
 50% save energy with new design fan (compare with our products)
- 薄型、軽量  
 Compact type, Thin & light weight
- 標準品は短納期・低価格  
 Short lead time. low price.
- 各種 Size に対応可  
 Various models

## 仕様 Specifications

型式	ACUN-10T	ACUN-13T	ACUN-20T	ACUN-24T	ACUN-40T	ACUN-55T
外形寸法(mm) Outer Dimension	610W×610D ×300H	762W×610D ×300H	915W×610D ×300H	1220W×610D ×300H	1500W×750D ×310H	1500W×750D ×335H
重量(kg) weight	15.8	16.9	18.0	22.5	28	31
構造 Structure	Aluminum (A5052P) 白 Alumite					
Motor/ Fan	200V/220V 3φ 6P 0.1 kW 羽根車 φ 385			200V/220V 3φ 6P 0.25kW φ 480		200V/220V 3φ 6P 0.25kW φ 510
Hepa Filter	1T-600LP	1T-830LP	1T-980LP	1T-1200LP	1T-1500LP	1T-7501500A-2LXY
電源 Power	AC200V/220V 3φ 50/60Hz					
平均風速(m/s)	0.55/0.70	0.54/0.69	0.50/0.61	0.48/0.58	0.65/0.78	0.82/0.93
風量(m³/min)	10.7/13.4	13.3/17.0	14.9/18.2	19.3/23.2	41/49	55/62
電流(A)	0.47/0.56	0.48/0.57	0.48/0.57	0.47/0.54	1.19/1.2	1.36/1.56
電力(W)	78/120	81/122	83/124	82/120	184/259	288/408
回転数(rpm)	947/1088	942/1074	947/1086	945/1086	963/1113	940/1050
静圧(Pa)	88/106	88/107	83/106	69/83	89/110	100/137